


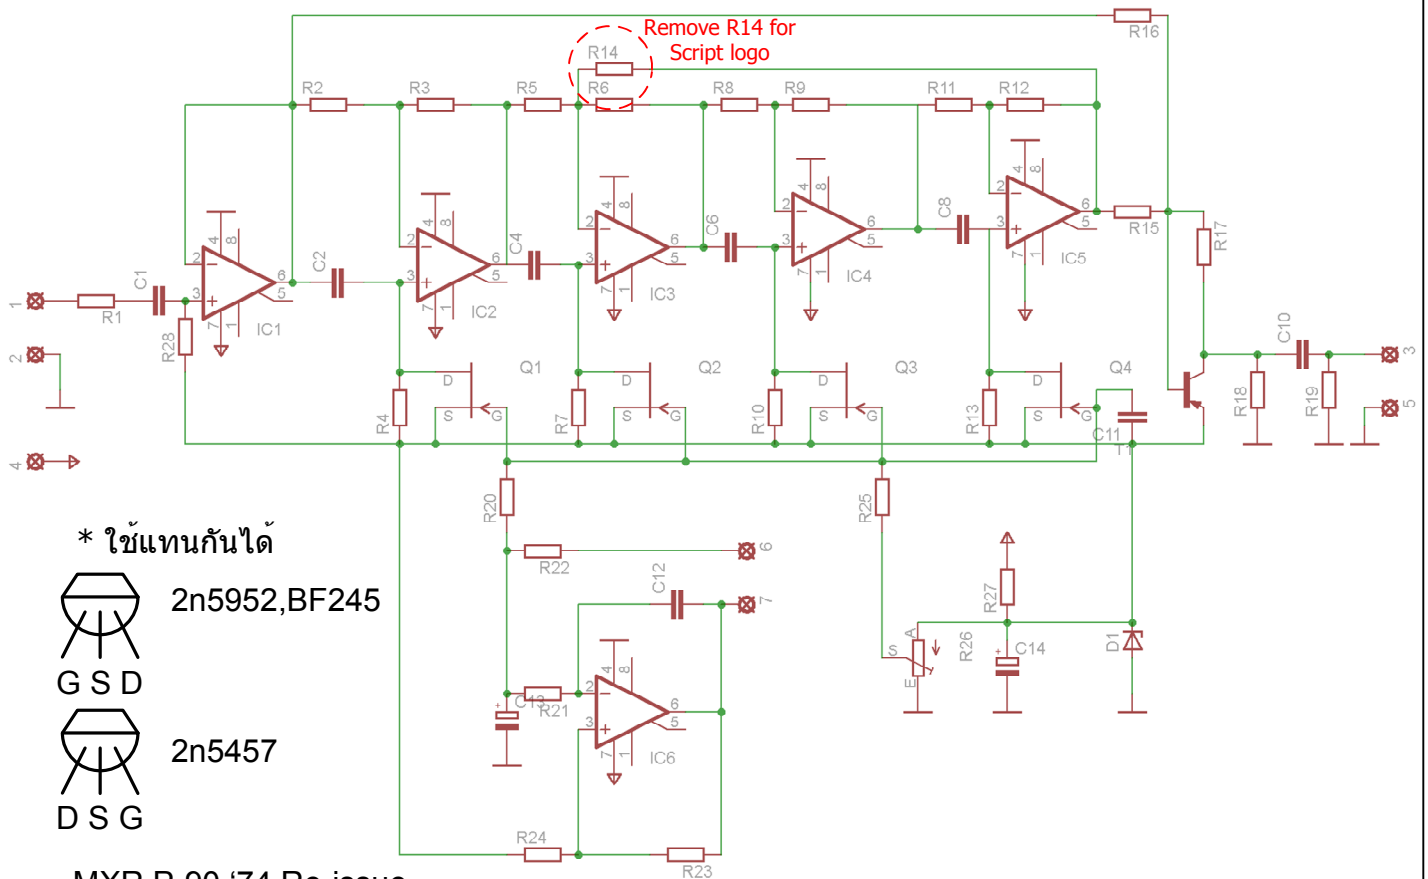

MXR P-90 '74 Re-issue

D1 ZD5v1

IC1-IC6 741

*Q1-Q4

2n5952, BF245, 2n5457

T1 2N4125

C1 10n

C2 47n

C4 47n

C6 47n

C8 47n


C10 100n

C11 47n

C12 10n

C13 15/16v (22/16v)

C14 10/50v

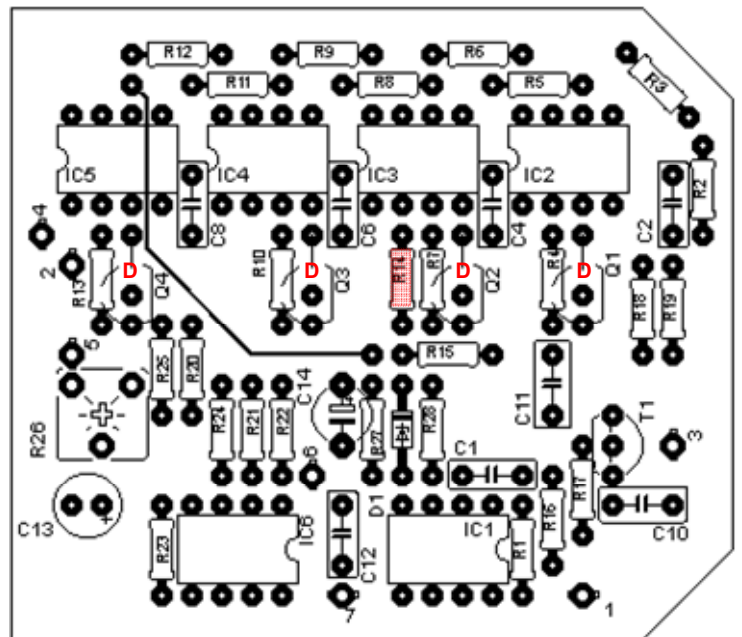

R. 1/4watt.

1	input	2,5	gnd	3	output	4	+V	6,7	Speed
---	-------	-----	-----	---	--------	---	----	-----	-------

R1	10k	R11	10k	R21	150k
R2	10k	R12	10k	R22	4k7
R3	10k	R13	22k	R23	470k
R4	22k	R14*	22k	R24	150k
R5	10k	R15	150k	R25	1m
R6	10k	R16	150k	R26	VR220k
R7	22k	R17	150k	R27	10k
R8	10k	R18	56k	R28	470k
R9	10k	R19	150k		
R10	22k	R20	3m9		

Speed 500kC or 500kA

ปรับ Speed ไว้ตรงกลาง แล้วปรับ R26 จนได้ยินเสียงแฉวงไปมา

Site: www.circuitfx.com

Blog: www.circuitfx.wordpress.com

Drawing: effectmaker